

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
1 June 2006 (01.06.2006)

PCT

(10) International Publication Number  
**WO 2006/057322 A1**

(51) International Patent Classification:  
**G08B 13/194** (2006.01) **G08C 17/02** (2006.01)

(21) International Application Number:  
PCT/JP2005/021640

(22) International Filing Date:  
18 November 2005 (18.11.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2004-341074 25 November 2004 (25.11.2004) JP

(71) Applicant (for all designated States except US): **MATSUSHITA ELECTRIC WORKS, LTD.** [JP/JP]; 1048, Oaza-Kadoma, Kadoma-shi, Osaka, 5718686 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **FUKUI, Suguru** [JP/JP]; c/o Matsushita Electric Works, Ltd., 1048, Oaza-Kadoma, Kadoma-shi, Osaka, 5718686 (JP). **HATATANI, Teruki** [JP/JP]; c/o Matsushita Electric Works, Ltd., 1048, Oaza-Kadoma, Kadoma-shi, Osaka, 5718686 (JP). **TAKADA, Yuji** [JP/JP]; c/o Matsushita Electric Works, Ltd., 1048, Oaza-Kadoma, Kadoma-shi, Osaka, 5718686 (JP).

(74) Agents: **NISHIKAWA, Yoshikiyo** et al.; Hokuto Patent Attorneys Office Umeda-Daiichiseimei Bldg. 5th Floor, 12-17, Umeda 1-chome, Kita-ku, Osaka-shi, Osaka, 5300001 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: WIRELESS SENSOR DEVICE

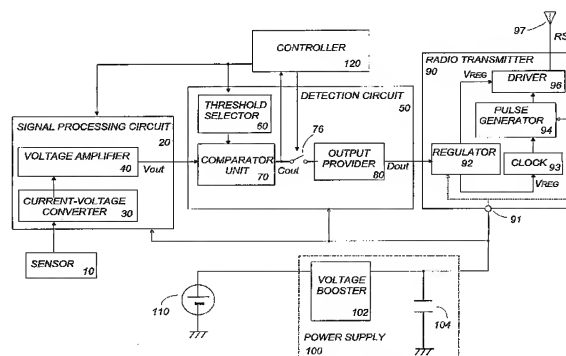

(57) Abstract: A wireless sensor device of low energy consumption operates over a prolonged period of time for providing a reliable sensor result. The wireless sensor device includes a sensor configured to sense a target object and provide a sensor signal of varying levels indicative of condition of the target object, a signal processing circuit configured to amplify the sensor signal and give an amplified electric analog signal, and a detection circuit configured to receive the amplified analog signal and provide a detection output when the electric analog signal goes beyond a predetermined detection threshold. Also included in the device is a radio transmitter which transmits a radio detection signal in response to the detection output. Further, the device includes a power supply configured to provide an electric power to the signal processing circuit and the radio transmitter; and a power generating element which converts an external energy into the electric power to be accumulated in the power supply. The controller is included to activate the radio transmitter only in response to the detection output, permitting the radio transmitter to generate the radio detection signal. Thus, the radio transmitter can be kept inactivated until receiving the detection output, thereby saving energy to prolong the operating life of the device.

WO 2006/057322 A1